



# **BUILT FOR SAFETY DESIGNED FOR COMFORT**

Beyond Compliance –  
The New Generation of Safety Harnesses

---

Miller H500 Series

---

**Honeywell**  
**MILLER®**



# THE WORKER-CENTRIC SAFETY HARNESS

Two important goals of ergonomics are the comfort and the health & safety of workers. In many ways, these are mutually compatible, for where health and safety are jeopardized, discomfort results. When it comes to working at height, few tasks are more dangerous than steel erection and scaffolding. Not only are construction workers at risk of fall, but long hours spent in a restrictive non-ergonomic heavy harness can lead to muscular fatigue due to restricted freedom of movement, overexertion, repetitive tasks, load exposure, sweat and heat build-up...often resulting in frustration and complacency. These states can cause or contribute to critical errors, such as eyes and mind not on the task and bad

posture, leading workers to be less compliant to their harness (incorrect fit and adjustment, no anchor point attachment, etc.) which may increase the risk of musculoskeletal disorders (MSDs) and fall.

Honeywell recognized the need for change and revolutionized a new generation of safety harnesses, the Miller H500 series, around four key worker-centric value drivers: ergonomic safety, usability, style and performance.

The new Honeywell Miller® H500 integrates evidence-based “best-in-class” anatomically and ergonomically designed pressure-relief breathable paddings for more comfort and freedom of movement,

and introduces a variety of other new smart and intuitive safety features.

The Honeywell Miller® H500 safety harness synthesizes safety, quality and comfort. Whereas some other harnesses may protect workers from serious injury at the expense of their long-term well-being, the Honeywell Miller® H500 aims beyond compliance to keep workers safe and supported – making their jobs easier and keeping them more safe.

# A NEW AGE OF SAFETY HARNESSES



## 1 Greater freedom of movement

- **New** patented shoulder/back padding design minimises overhead muscular fatigue (overexertion)
- **New** specially formulated webbing flexes to accommodate movement and body contours for optimum comfort around legs and shoulders
- **New** side-adjustment straps for better ergonomic fit
- H-Design leg design for greater user comfort
- Lighter-than-ever harnesses

## 2 More breathability

- **New** “best-in-class” anatomically and ergonomically designed pressure-relief breathable shoulder/back padding keeps workers drier and cooler
- **Three times more breathable** compared to the next best alternative (less water vapour resistance – RET)\*

## 3 Smart anti-tangle for a hassle-free donning experience

## 4 Dedicated SRL web link for an easy attachment of personal SRLs

## 5 User friendly resettable Pull-Free lanyard keepers

- Allows users to attach lanyard when not in use

## 6 Clearly identifiable fall impact indicators for hassle-free inspection

## 7 Improved visible stitch pattern for easy inspection

## 8 Lightweight aluminum Quick-release Cobra® buckles

## 9 Highly visible protected label protection for hassle-free inspection

## 10 Water repellent webbing and rated 140 kg (max weight capacity)

\*As per the Satra Technology technical report.

# NEW MODERN DESIGN FOUR CORE MODELS

The modern ergonomic design provides higher visibility, smarter features and safer, more comfortable functionality. Select from four models, available in three sizes.

## HONEYWELL MILLER® H500

### INDUSTRY COMFORT (IC)

### QUICK FIT (QF)

### INDUSTRY STANDARD (IS)

### HIGH VISIBILITY (HV)



- Highly breathable, lightweight, ergonomic shoulder/back padding
- Specially formulated comfortable leg and shoulder webbing
- User-friendly resettable lanyard keepers



- Lightweight breathable mesh vest
- Specially formulated comfortable leg and shoulder webbing
- User-friendly resettable lanyard keepers




- Smart anti-tangle easy-donning solution
- Specially formulated comfortable leg and shoulder webbing
- User-friendly resettable lanyard keepers



- Comfortable and lightweight lined High Visibility jacket (EN ISO 20471 Class 2)
- Specially formulated comfortable leg and shoulder webbing
- Auto quick-release leg buckles

## BREATHABILITY DATA

The **lower** the RET (water vapor resistance) value is, the **higher the breathability**.

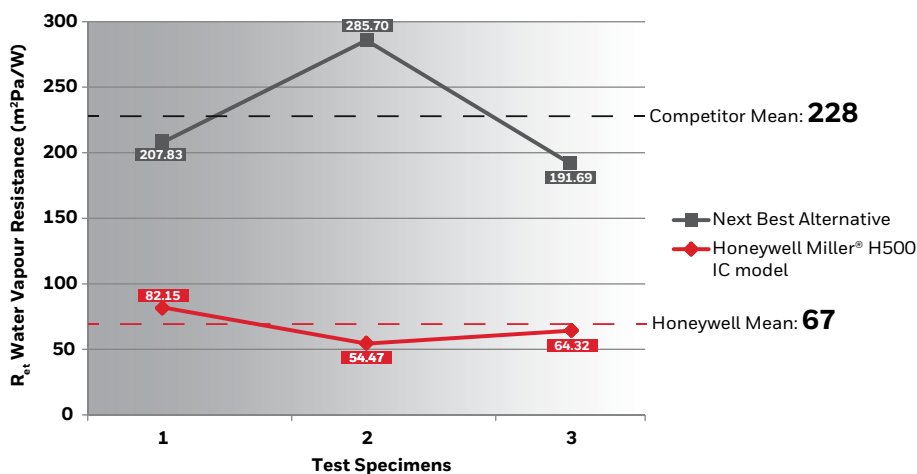

## FEATURES

- Lightweight, ergonomic, breathable harness
- Comfortable around the legs, back and shoulders
- Increased freedom of movement
- Smart resettable lanyard keepers and SRL web link
- Quick and easy to fit
- Improved visible stitch pattern
- Clearly identifiable fall impact indicators
- Water-repellent webbing

# HONEYWELL MILLER® H500 MODEL GUIDE

CORE MODELS	VARIANT	LEG BUCKLES	CHEST BUCKLES	ATTACHMENT POINTS			SIZING	PART NUMBERS
				BACK	FRONT	SRL WEB LINK		
<b>IC MODEL</b> 	IC6	Auto Quick-release	Auto Quick-release	D-ring	D-ring	Yes	1	1036081
							2	1036082
							3	1036083
	IC7	Auto Quick-release	Auto clip	D-ring	2 web loops	Yes	1	1036085
							2	1036086
							3	1036087
<b>QF MODEL</b> 	QF1	Auto Quick-release	Auto clip	D-ring	2 web loops	No	1	1036109
							2	1036121
							3	1036122
<b>IS MODEL</b> 	IS1	Mating	Auto clip	D-ring	None	No	1	1036089
							2	1036090
							3	1036091
	IS2	Auto Quick-release	Auto clip	D-ring	None	No	1	1036093
							2	1036094
							3	1036095
	IS3	Mating	Mating	D-ring	D-ring	No	1	1036097
							2	1036098
							3	1036099
	IS4	Auto Quick-release	Auto Quick-release	D-ring	D-ring	No	1	1036101
							2	1036110
							3	1036111
	IS5	Mating	Auto clip	D-ring	2 web loops	No	1	1036113
							2	1036103
							3	1036104
	IS6	Auto Quick-release	Auto clip	D-ring	2 web loops	No	1	1036106
							2	1036107
							3	1036108
<b>HV MODEL</b> 	HVY1	Auto Quick-release	Auto clip	D-ring	2 web loops	No	1	1036123
							2	1036124
							3	1036125
	HVY2	Auto Quick-release	Auto Quick-release	D-ring	D-ring	No	1	1036126
							2	1036127
							3	1036128
	HV01	Auto Quick-release	Auto clip	D-ring	2 web loops	No	1	1036129
							2	1036130
							3	1036131
	HV02	Auto Quick-release	Auto Quick-release	D-ring	D-ring	No	1	1036132
							2	1036133
							3	1036134

## HEIGHT/STATURE (EN CM)

	150	155	160	165	170	175	180	185	190	195	200
140	S1			S2				S3			
130	S1			S2				S3			
120	S1			S2				S3			
110	S1			S2				S3			
100	S1			S2				S3			
90	S1			S2				S3			
80	S1			S2				S3			
70	S1			S2				S3			
60	S1			S2				S3			
50	S1			S2				S3			
40	S1			S2				S3			

The new Honeywell Miller® H500 Series meets the EN-361 standard.

# SELF-RETRACTING LIFELINES

## Miller® Falcon™ Edge

In work environments of every variety, edges at height are much more common than people are aware of. Simply look around any construction site and note the many different edges that exist such as edges of a floor, roof or formwork. Designed for performance in edge applications, Falcon Edge SRLs offer versatility, reliability, and maximum safety.



### WE HAVE YOUR BACK

Honeywell Miller® has a full complement of associated products to ensure your PPE needs are met. With years of experience in the field and a name you can trust why not utilise our full range that is specifically designed to work together.

REF.	CABLE LENGTH METERS	CABLE	CONNECTORS			WEIGHT KG	DIMENSIONS mm
			TOP		BOTTOM		
			KARABINER	SWIVEL	SNAP HOOK WITH FALL INDICATOR AND INTEGRATED SWIVEL		
1034052	6.2	Galvanized steel	x	x	Galvanized steel	4,5	870 x 213 x 101
1034053	9	Galvanized steel	x	x	Galvanized steel	4,8	870 x 213 x 101
1034054	15	Galvanized steel	x	x	Galvanized steel	7,5	960 x 246 x 101
1034055	18	Galvanized steel	x	x	Galvanized steel	7,8	960 x 246 x 101
1034056	6,2	Stainless steel	x	x	Stainless steel	4,5	870 x 213 x 101
1034057	9	Stainless steel	x	x	Stainless steel	4,8	870 x 213 x 101
1034058	15	Stainless steel	x	x	Stainless steel	7,5	960 x 246 x 101
1034059	18	Stainless steel	x	x	Stainless steel	7,8	960 x 246 x 101

# CABLE LIFELINE FOR EDGE APPLICATIONS

## TurboLite™ EDGE

- Designed for use in edge applications with radius  $\geq 0,5$  mm
- Certified to EN360: 2002, VG11 (Rev 08) edge tested, compliant with datasheet CNB/P/11.060
- Honeywell Spectra® webbing lifeline provides outstanding chemical, abrasion, and cut resistance
- Available in lengths of 2,75 m & 3,65 m
- Single and twin configurations
- Variety of lifeline connector options



REF	LENGTH (M)	CONFIG.	MATERIAL	HARNES CONN.	ANCHORAGE CONNECTOR
1035741-E	2,75	Single	Web	Pin	Snaphook Alu with Swivel
1035743-E	2,75		Web	Pin	Scaffhook Alu with Swivel
1035742-E	2,75		Web	Pin	Twistlock Alu with Swivel
1035745-E	2,75	Twin	Web	Pin	Snaphook Alu with Swivel
1035747-E	2,75		Web	Pin	Scaffhook Alu with Swivel
1035746-E	2,75		Web	Pin	Twistlock Alu with Swivel
1035749-E	3,65	Single	Web	Pin	Snaphook Alu with Swivel
1035751-E	3,65		Web	Pin	Scaffhook Alu with Swivel
1035750-E	3,65		Web	Pin	Twistlock Alu with Swivel
1035753-E	3,65	Twin	Web	Pin	Snaphook Alu with Swivel
1035755-E	3,65		Web	Pin	Scaffhook Alu with Swivel
1035754-E	3,65		Web	Pin	Twistlock Alu with Swivel

## HONEYWELL MILLER TURBOLITE™ EDGE SELF RETRACTING LIFELINES

Edges are much more common than people realize – and they pose a greater risk in work sites of every variety. Without protection designed for edges, traditional lifelines risk being severed. Designed for performance in sharp and smooth edge applications, the TurboLite™ Edge offers versatility, enhanced user mobility, and maximum safety. The TurboLite™ Edge helps keep workers safe in applications requiring foot-level tie-off or working near edges.

## TurboLite™ EXTREME

- Designed for use in edge applications with radius  $\geq 0,5$ mm
- Certified to EN360: 2002, VG11 (Rev 08) edge tested, compliant with datasheet CNB/P/11.060
- Galvanized cable lifeline
- Available in length of 2,75 m
- Single and twin configurations
- Variety of lifeline connector options



REF	LENGTH (M)	CONFIG.	MATERIAL	HARNES CONN.	ANCHORAGE CONNECTOR
1035728-E	2,75	Single	Cable	Pin	Snaphook Steel with Swivel
1035729-E	2,75		Cable	Pin	Scaffhook Steel with Swivel
1035731-E	2,75		Cable	Pin	Twistlock Alu with Swivel
1035732-E	2,75		Cable	Pin	Scaffhook Alu with Swivel
1035733-E	2,75	Twin	Cable	Pin	Snaphook Steel with Swivel
1035734-E	2,75		Cable	Pin	Scaffhook Steel with Swivel
1035735-E	2,75		Cable	Pin	Twistlock Alu with Swivel
1035736-E	2,75		Cable	Pin	Scaffhook Alu with Swivel

## **Honeywell Safety Products**

### **United Kingdom**

#### **Honeywell Safety Products UK Ltd**

Edison Rd

Basingstoke RG21 6QD

United Kingdom

Phone: +44 (0) 1256 274 938

Fax: +44 (0) 1256 693 300

Email: [info-uk.hsp@honeywell.com](mailto:info-uk.hsp@honeywell.com)

### **Honeywell Safety Products Nordics**

Honeywell Safety Products Nordic AB

Strandbadsvägen 15

SE-252 29 Helsingborg – Sverige

Phone: +46 (0) 424480433

Email: [info-nordic.hsp@honeywell.com](mailto:info-nordic.hsp@honeywell.com)

[www.honeywellsafety.com](http://www.honeywellsafety.com)

TurboLite™, Spectra®, Miller®, 5K® and Falcon™ are trademarks or registered trademarks of Honeywell International, Inc. Cobra® is a registered trademark of AustriAlpin. Vectran™ is a trademark of Kuraray Co, LTD. 3M™ Protecta® is a trademark of 3M.

HIS-FALL-Miller-H500-Harness-BRO-EN-A4 | 08/2020  
Europe Version  
© 2020 Honeywell International Inc.

**THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT**

**Honeywell**